


1 2 3 4 5 6 7 8 9 10 11 12 13 14

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

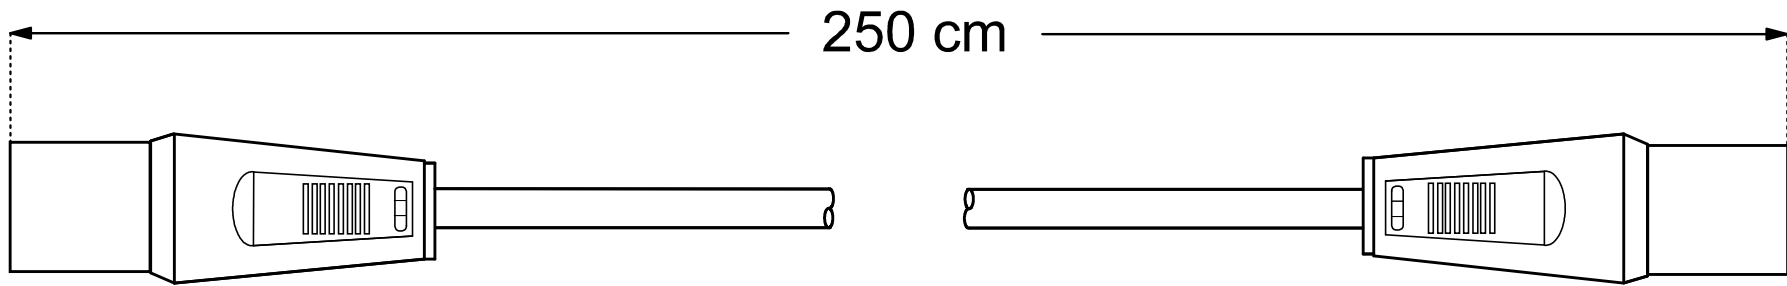

- Koaxial Anschluss Kabel; schwarz
  - Koaxialstecker --- Koaxialkupplung
  - doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
  - Impedanz 75 Ohm
  - 32er Geflecht
  - Innenleiter: 0,5 mm CCS
  - Aussendurchmesser: 5,0 mm
  - Ausführung: 3C-2V
  - RoHS-konform
- coaxial cable; 2.50 m; black; bulk
  - coaxial plug --- coaxial jack
  - double shielded coaxial cable (Al foil screening + net)
  - impedance 75 ohm
  - 32 braiding
  - inner conductor: 0.5mm CCS
  - outer diameter: 5.0 mm
  - impedance 75 ohm
  - construction: 3C-2V
  - RoHS-compliant

**Änderungen**

Änderungen		Datum	Name
Datum	Name	gez.: 07.05.2009	li
		gepr.: 07.05.2009	li
		Norm:	

Bezeichnung	Blatt
<b>AK 250 B</b> 11722	
Zeichnungs-Nr.:	von



1 2 3 4 5 6 7 8 9 10 11 12 13 14