



Construction

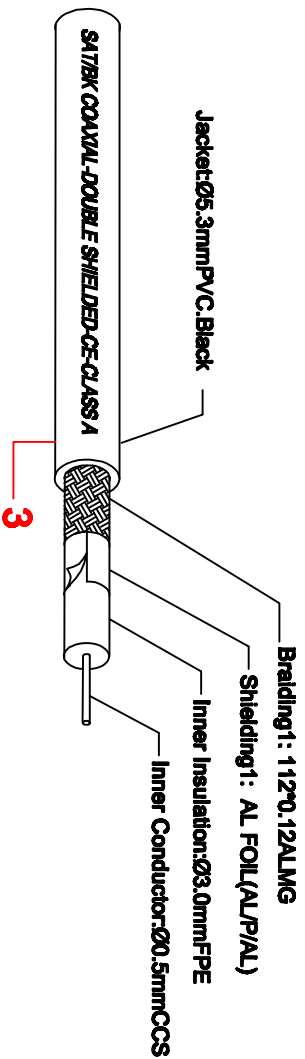

Wiring Method

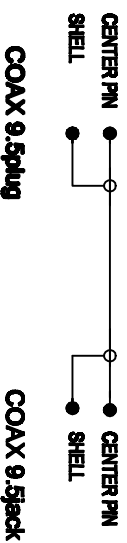

1. dimensions As shown
2. Insulation resistance ≥ 100 up to 500V=
3. dielectric strength
2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

No	Item	Length	Packaging
50728	BKM 0150-B	1.5m	1/1/0/60/160
50729	BKM 0250-B	2.5m	1/1/0/60/120
50743	BKM 0350-B	3.5m	1/1/0/40/80
50730	BKM 0500-B	5.0m	1/1/0/30/60
50731	BKM 0750-B	7.5m	1/5/20/40
50727	BKM 1000-B	10	1/5/20/40

7	MOLDDED	PVC 4SP Black	2*12g
6	FERRITE	φ9.8mm H:13.5mm	4PCS
5	Copper coil	φ4.5mm H:8mm	2PCS
4	MOLDDED1	PVC 4SP Black	2*10g
3	CABLE	φ5.3 RG59 COAXIAL CABLE Black(according to the chart)	L
2	CONNECTOR82	COAX 9.5 Jack (Nickel plating 100%Shielded)	1set
1	CONNECTOR81	COAX 9.5 Plug (Nickel plating 100% Shielded)	1set
NO	Item Name	SPEC	QTY
Edition	WEC/000	Scale	

Designed by	ming hong	Item Name	COAX PLUG TO COAX JACK COAXIAL CABLE WITH FERRITE
Checked by		Item NO	BKM-B series cable
Approved by		Unit:	MM
Date	11.28.2013		