




Aderquerschnitt / Wire cross section

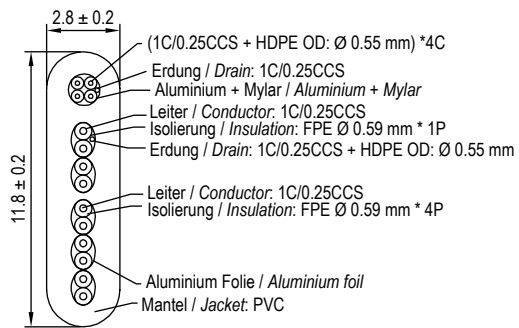

Pin-Belegung / Pin Assignment

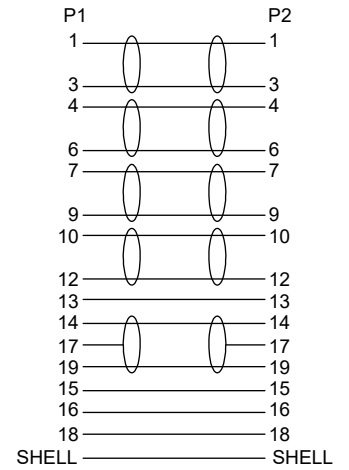

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Max. Übertragungsrate / Max. data transmission rate
61277	HDMI 2.0 Kabel Flat 0100 1,0m (15+1) sw	1000 ± 30 mm	18 Gbit/s
61278	HDMI 2.0 Kabel Flat 0150 1,5m (15+1) sw	1500 ± 30 mm	18 Gbit/s
61279	HDMI 2.0 Kabel Flat 0200 2,0m (15+1) sw	2000 ± 30 mm	18 Gbit/s
61280	HDMI 2.0 Kabel Flat 0300 3,0m (15+1) sw	3000 ± 30 mm	18 Gbit/s
61281	HDMI 2.0 Kabel Flat 0500 5,0m (15+1) sw	5000 ± 50 mm	10.2 Gbit/s

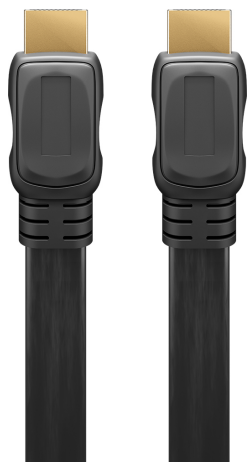

High-Speed-HDMI™-Flachkabel mit Ethernet

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (Ultra HD 2160p)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal
- beidseitiger Knickschutz

Anschlüsse: 2x HDMI™-Stecker (Typ A)
Material Kabelmantel: PVC
Isolationswiderstand: 5 MΩ min.
Kontaktwiderstand: 3 Ω max.
Unterstützte Audiostandards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Weitere unterstützte Standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

High Speed HDMI™ Flat Cable with Ethernet

- high-definition signal transmission with up to 4K @ 60 Hz (Ultra HD 2160p)
- gold-plated HDMI™ connectors
- integrated Ethernet channel
- kink protection on both sides

Connections: 2x HDMI™ plug (Type A)
Material cable jacket: PVC
Insulation resistance: 5 MΩ min.
Contact resistance: 3 Ω max.
Supported audio standards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Other supported standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	03.01.2023	HDMI 2.0 Kabel Flat XXXX Xm (15+1) sw	1/1
02.03.2023	ir	gepr.:	03.01.2023		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					

