
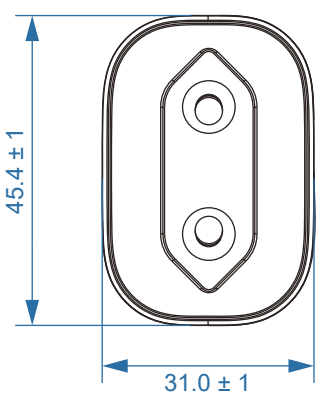
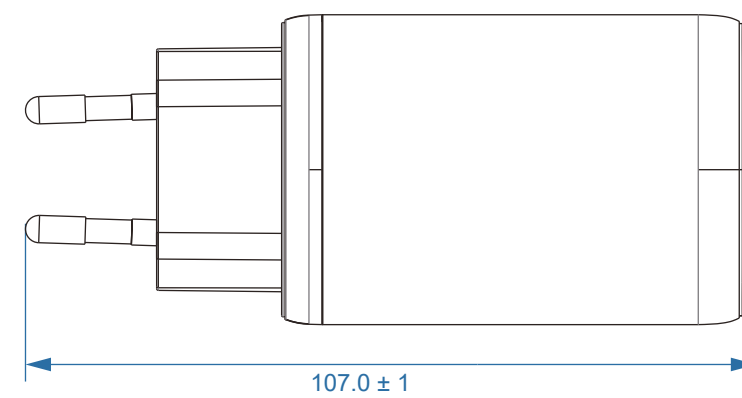
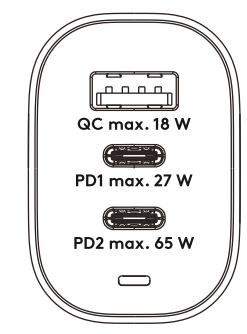



1	2	3	4	5	6	7	8	9	10	11	12	13	14
<b>Art.-Nr. / Item No.</b>		<b>Farbe / Colour</b>											
61760		schwarz / black											
61759		weiß / white											
													
<b>USB-C™ PD (Power Delivery) Schnellladegerät (65 W)</b> Anschlüsse: Eurostecker (Typ C, CEE 7/16), USB-A-QC-Buchse (Quick Charge), 2x USB-C™-PD-Buchse (Power Delivery) Eingang: 110-240 V ~, 50/60 Hz, 1,5 A Ausgang QC: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 2,0 A, 18,0 W oder 12,0 V =, 1,5 A, 18,0 W Ausgang PD1: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 2,25 A, 27,0 W Ausgang PD2: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 3,0 A, 36,0 W oder 15,0 V =, 3,0 A, 45,0 W oder 20,0 V =, 3,25 A, 65,0 W Ausgang QC+PD1: 5,0 V =, 3,0 A, 15,0 W Ausgang QC+PD2: QC: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 2,0 A, 18,0 W oder 12,0 V =, 1,5 A, 18,0 W PD2: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 2,5 A, 30,0 W oder 15,0 V =, 2,0 A, 30,0 W oder 20,0 V =, 1,5 A, 30,0 W Ausgang PD1+PD2: PD1: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 2,25 A, 27,0 W PD2: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 2,5 A, 30,0 W oder 15,0 V =, 2,0 A, 30,0 W oder 20,0 V =, 1,5 A, 30,0 W Ausgang QC+PD1+PD2: QC+PD1: 5,0 V =, 3,0 A, 15,0 W PD2: 5,0 V =, 3,0 A, 15,0 W oder 9,0 V =, 3,0 A, 27,0 W oder 12,0 V =, 2,5 A, 30,0 W oder 15,0 V =, 2,0 A, 30,0 W oder 20,0 V =, 1,5 A, 30,0 W Ø Effizienz im Betrieb: 83,5 % Effizienz bei geringer Last (10%): 68,9 % Leistungsaufnahme bei Nulllast: 0,20 W Schutzklasse: II Gewicht: 126 g				<b>USB-C™ PD (Power Delivery) Fast Charger (65 W)</b> Connectors: Euro plug (Typ C, CEE 7/16), USB-A QC (Quick Charge) socket, 2x USB-C™ PD (Power Delivery) socket Input: 110-240 V ~, 50/60 Hz, 1,5 A Output QC: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 2,0 A, 18,0 W or 12,0 V =, 1,5 A, 18,0 W Output PD1 : 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 2,25 A, 27,0 W Output PD2: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 3,0 A, 36,0 W or 15,0 V =, 3,0 A, 45,0 W or 20,0 V =, 3,25 A, 65,0 W Output QC+PD1: 5,0 V =, 3,0 A, 15,0 W Output QC+PD2: QC: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 2,0 A, 18,0 W or 12,0 V =, 1,5 A, 18,0 W PD2: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 2,5 A, 30,0 W or 15,0 V =, 2,0 A, 30,0 W or 20,0 V =, 1,5 A, 30,0 W Output PD1+PD2: PD1: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 2,25 A, 27,0 W PD2: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 2,5 A, 30,0 W or 15,0 V =, 2,0 A, 30,0 W or 20,0 V =, 1,5 A, 30,0 W Output QC+PD1+PD2: QC+PD1: 5,0 V =, 3,0 A, 15,0 W PD2: 5,0 V =, 3,0 A, 15,0 W or 9,0 V =, 3,0 A, 27,0 W or 12,0 V =, 2,5 A, 30,0 W or 15,0 V =, 2,0 A, 30,0 W or 20,0 V =, 1,5 A, 30,0 W Average active efficiency: 83.5% Efficiency at low load (10 %): 68.9 % Power consumption at no load: 0.20 W Protection class: II Weight: 126 g									
<b>Änderungen</b>				<b>Datum</b>		<b>Name</b>		<b>Bezeichnung</b>				<b>Blatt</b>	
Datum		Name		gez.:	31.01.2023	aw		<b>TRA USB 65W 3 Port</b> <b>2xUSB-C/1xUSB-A sw/ws PL</b> 				<b>1/1</b>	
				gepr.:	31.01.2023	aw							
				Norm:				Zeichnungs-Nr.:				von	
				Änderungen vorbehalten / Subject to change				61760, 61759					