



Construction

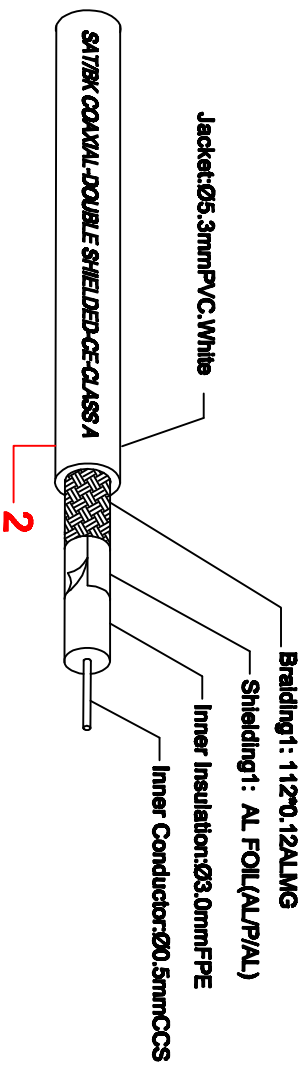

Wiring Method

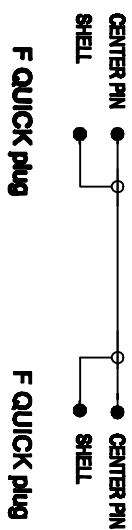

1. dimensions As shown
2. Insulation resistance: ≥ 100 up to 500V=
3. dielectric strength
2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

No	Item	Length	Packaging
62743	BQF 0150-G	1.5m	1/10/80/160
62744	BQF 0250-G	2.5m	1/10/80/120
62746	BQF 0350-G	3.5m	1/10/40/80
62747	BQF 0500-G	5.0m	1/10/30/80

4	Copper coil	φ4.5mm H:8mm	2PCS
3	MOULDED	PVC ASP White	2*10g
2	CABLE	φ5.3 RG58 COAXIAL CABLE White/(according to the chart)	L
1	CONNECTOR(S)	F QUICK Plug (Gold plating 100% Shielded)	2set
NO	Item Name	SPEC	QTY
Edition	WEC/000	Scale	
Designed by	ming hong	Item Name	F QUICK PLUG TO F QUICK PLUG COAXIAL CABLE
Checked by		Item NO	BQF-G series cable
Approved by		Unit:	MM
Date	11.28.2013		