


Specification	Frequencyrange (MHz)	Strength (dB)
Insertion loss (IN-OUT)	5-1000	-
Insertion loss (IN-RADIO)	0.15-26	8
	88-108	
	111-125	
Insertion loss (IN-TV)	125-139	3
	5-30	
	47-68	
Return loss	125-1000	4
	INPUT	10
	OUTPUT	-
	TV	10
	RADIO	

- TV male, RADIO female
- RFI shielded zinc die-casting housing
- Screening efficiency acc. EN 50083-2 Class A

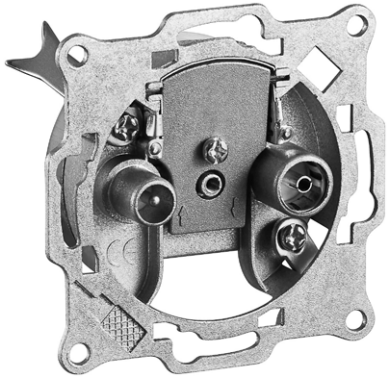

- 2-Loch Antennen-Dose (TV/Radio)
- Stich- oder Enddose
- Universal-Antennendose für BK- und Rundfunkanlagen
- Sonderkanal und Rückkanal tauglich
- 75 Ohm
- RoHS-konform

- 2-way Antenna-Wall-Socket (TV/Radio)
- stub or terminal socket
- Universal Antenna wall socket for BK and Radio systems
- suitable for Digital channel and back channel.
- 75 Ohm
- RoHS-compliant

Änderungen

Datum	Name	gez.:	Datum	Name
		gef.:	27.01.2014	tf
		gepr.:	27.01.2014	tf
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung	Blatt
SAT AD 02-01	
Zeichnungs-Nr.:	von
67011/68851	

