



Construction

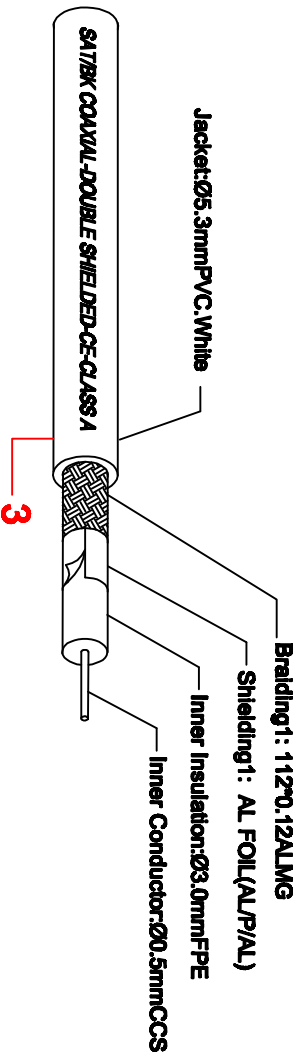

Wiring Method



COAX 9.5 Plug

COAX 9.5 Jack

1. dimensions As shown
2. Insulation resistance: $\geq 10\Omega$ up to 500V=
3. dielectric strength
2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

No	Item	Length	Packaging
67276	BKM 0150-G	1.5m	1/10/80/160
67277	BKM 0250-G	2.5m	1/10/60/120
67278	BKM 0350-G	3.5m	1/10/40/80
37279	BKM 0500-G	5.0m	1/10/30/60
67280	BKM 0750-G	7.5m	1/5/20/40
67275	BKM 1000-G	10	1/5/20/40

7	MOLDED2	PVC 4SP White	2*12g
6	FERRITE	ø9.8mm H:13.5mm	4PCS
5	Copper coil	ø4.5mm H:6mm	2PCS
4	MOLDED1	PVC 4SP White	2*10g
3	CABLE	ø5.3 RG58 COAXIAL CABLE White/(according to the chart)	1
2	CONNECTOR82	COAX 9.5 Jack (Gold plating 100%Shielded)	1set
1	CONNECTOR81	COAX 9.5 Plug (Gold plating 100% Shielded)	1set
NO	Item Name	SPEC	QTY
Edition	WEC/000	Scale	
Designed by	wing hong	Item Name	COAX PLUG TO COAX JACK COAXIAL CABLE WITH FERRITE
Checked by		Item NO	BKM-G series cable
Approved by		Unit:	MM
Date	11.28.2013		