

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A






Steckerbelegung / PIN Assignment

P1 P2

- 1 — 1
- 2 — 2
- 3 — 3
- 4 — 4
- 5 — 5
- 6 — 6
- 7 — 7
- 8 — 8
- 9 — 9
- 10 — 10
- 11 — 11
- 12 — 12
- 13 — 13
- 14 — 14
- 15 — 15
- 16 — 16
- 17 — 17
- 18 — 18
- 19 — 19

SHELL — SHELL

P1

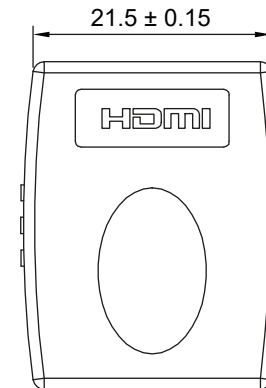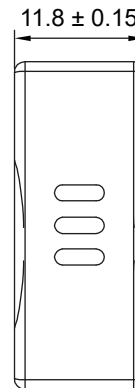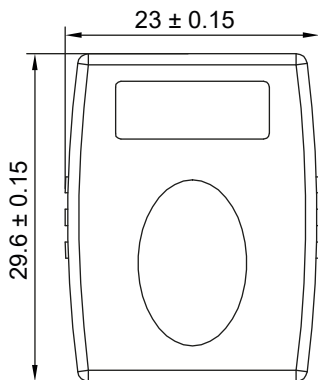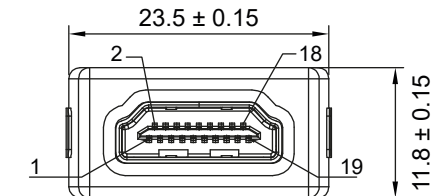

B

C

D

E

F

G

H



HDMI™ Adapter

- zur Verbindung von 2 HDMI™-Kabeln (ohne Verstärkung/ Signalaufbereitung)
- zur verlustfreien Verlängerung vorhandener HDMI Kabel. Eignet sich für alle digitalen AV-Signale (Fernseher, Beamer/Projektoren, SAT-Receiver, Spielekonsolen etc.).

Anschlüsse: 2x HDMI™-Buchse (Typ A)
 max. Auflösung: 4K Ultra HD 2160p (60 Hz)
 Material: PVC 45P
 Kontakte: vernickelt
 Isolationswiderstand: 300 V $\overline{=}$, 10 M Ω min.
 Kontaktwiderstand: 5 Ω max.

HDMI™ adapter

- to connect 2 HDMI™ cables (without gain / signal conditioning)
- Lossless extension of existing HDMI cables. Suitable for all digital AV signals (TV, projector / projectors, satellite receivers, game consoles, etc.).

Connectors: 2x HDMI™ jack (type A)
 max. Resolution: 4K Ultra HD 2160p (60 Hz)
 Material: PVC 45P
 Contacts: nickel-plated
 Insulation resistance: 300 V $\overline{=}$, 10 M Ω min.
 Contact resistance: 5 Ω max.

I

Änderungen

Datum	Name

Datum	Name
gez.: 06.07.2021	rs
gepr.: 06.07.2021	aw
Norm:	
Änderungen vorbehalten / Subject to change	

Bezeichnung	Blatt
Adapter HDMI F/HDMI F	1/1
Zeichnungs-Nr.: 68688	von



J

1 2 3 4 5 6 7 8 9 10 11 12 13 14