


3.5 MM AUX CABLE, STEREO

Transmits sound from a smartphone or laptop to almost all audio devices. Over up to 10 metres – and many years. The reason: a strong plug, gold-plated connectors and a flexible double shielded premium cable.

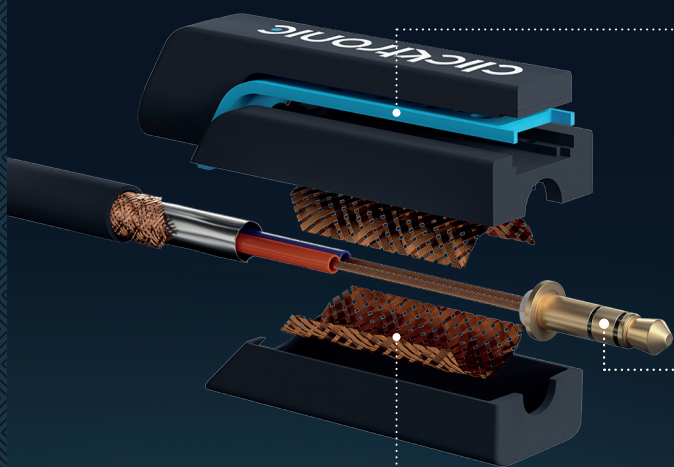

A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic 3.5 mm AUX cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 carat gold. This prevents them from oxidising. Plus: Unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.



DOUBLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the double shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic 3.5 mm AUX cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Brilliant audio – even after years: the inner conductors made from 99.9 % oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

3.5 MM AUX CABLE, STEREO



THE CONNECTION FOR MAXIMUM SOUND QUALITY

Every sound in its clearest form: the Clicktronic 3.5 mm AUX cable transmits analogue stereo signals in maximum quality – e.g. from smartphone, notebook or MP3 player to almost all audio devices: no matter whether it's a hi-fi stereo system, amplifier or loudspeaker. For an impressive audio experience.



INPUT



OUTPUT

ALL ADVANTAGES AT A GLANCE

CLEAR SOUND

Transmits analogue stereo signals in maximum quality from 3.5 mm M to 3.5 mm M.

BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

NO FLICKERING

Thanks to double insulation.

FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

RUST-FREE CONNECTOR

Even after years – thanks to a 24 carat gold coating.

SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

3.5 MM AUX CABLE, STEREO

SIGNAL TRANSMISSION

TRANSMISSION TYPES: analogue audio signals

CAPACITY (pF): 155


MAX. BANDWIDTH (MHz): 10

WAVE IMPEDANCE (Ω): 50


CIRCUIT DIAGRAM

P1 AUX

P2 AUX

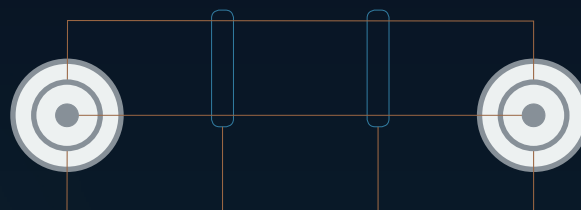

CABLE CROSS-SECTION

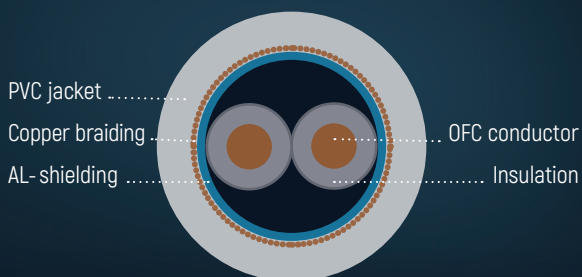

PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
1-10 m	2×9×0.12 mm	27	3.85 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
1.0 m	8.99 €	1/20/40	70476	4040849704765
1.5 m	9.99 €	1/20/40	70477	4040849704772
3.0 m	12.99 €	1/20/40	70479	4040849704796
5.0 m	14.99 €	1/15/30	70480	4040849704802
10.0 m	19.99 €	1/12/24	70482	4040849704826



SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.