



P1  
USB-A



12 ± 0.3




50 ± 5


L

6.47 - 6.75


P2  
iPhone 8Pin



Pin-Belegung / Pin assignment

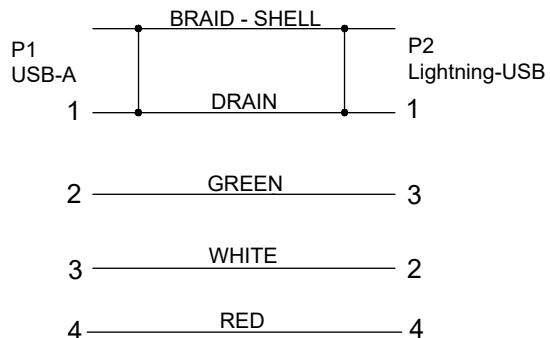

Aderquerschnitt / Wire cross section

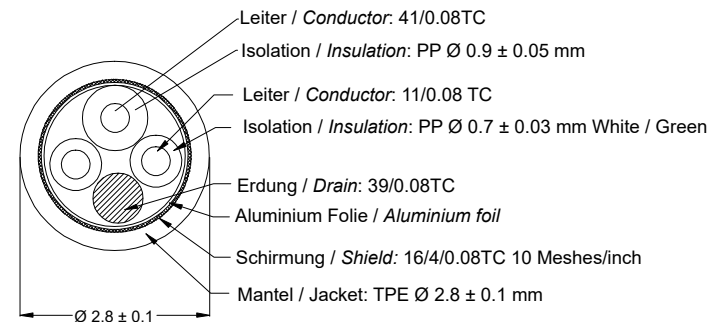

Artikel-Nr. / Article No.	Länge / Length (L)	Farbe / Color
54600	100 cm ± 20 mm	weiß / white
63523	100 cm ± 20 mm	schwarz / black
72904	50 cm ± 20 mm	schwarz / black
72905	50 cm ± 20 mm	weiß / white
72906	200 cm ± 30 mm	schwarz / black
72907	200 cm ± 30 mm	weiß / white
72908	300 cm ± 30 mm	schwarz / black

**Lightning - USB Lade- und Synchronisationskabel**

- Apple-MFI-Zertifizierung
- schmale Stecker passen perfekt auch bei Verwendung von Schutzhüllen
- beidseitiger Knickschutz
- Anschlüsse: Apple Lightning Stecker, USB 2.0-Stecker (Typ A)
- Max. Datenübertragungsrate: 480 Mbit/s
- Kabeltyp: Rundkabel
- Max. Strombelastbarkeit: 1A
- Konformität: RoHS

**Lightning - USB charging and sync cable**

- Apple MFI certification
- narrow connectors also fit perfectly when using protective covers
- bend protection on both sides
- Connectors: Apple Lightning plug, USB 2.0-plug (Type A)
- Max. data transmission rate: 480 Mbit/s
- Cable type: round cable
- Max. current carrying capacity: 1A
- Conformity: RoHS

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	14.12.2020	RS
		gepr.:	14.12.2020	aw
		Norm.:		
Änderungen vorbehalten / Subject to change				

Bezeichnung

DAT Lightning



Blatt

1

Zeichnungs-Nr.:

54600, 63523, 72904, 72905, 72906, 72907, 72908

von

1