

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

B

C

D

E

F

G

H

I

J

A

B

C

D

E

F


G

H

I

J

PVC insulation OD: 2.8x5.6 mm

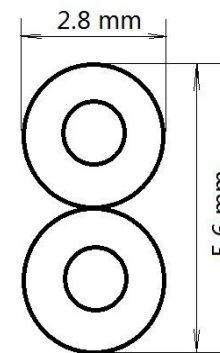

Conductor 2x32/0.20 mm CCA

Product	Name	Speaker Cable				
Conductor	Material	Copper Coated Aluminum			Electrical Characteristics (20°C)	Max. Conductor DC Resistanc at 20°C (Ω/M) 0.028
	Nom.O.D. (mm)	2x32/0.20 (2x1.0mm ²)	Up	+0.02		Rated Voltage (V) ≤36V
Jacket	External O.D.	2.8mm×2c	Up	+0.05	Sheath Physical Properties	Rated Temperature(°C) 70°C
			Down	-0.02		
	Surface	Smooth		View		
	Material	PVC(complies RoHS Reach) CPR(Eca)		Drawn By		
				Page		

no.	Packaging	Length (m)	color
56705	Cable Reel	100	red/black

Eca Fire class (CPR) according to DIN EN 13501-6

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	12.08.2021	TL	LSK 2x1,0mm ²	1/1
12.08.2021	TL	gepr.:				
			Norm:		Zeichnungs-Nr.: 56705	von
				Änderungen vorbehalten / Subject to change		



1 2 3 4 5 6 7 8 9 10 11 12 13 14